

HYT

Two-way Radio

CAVCOM
NOTHING SOUNDS SAFER®


TC-508

Analog
Two-way Radio
Affordable & Reliable



- Tough & Light-weight
- Robust & Reliable
- Longer Battery Life
- Enhanced Voice Quality

Hytera

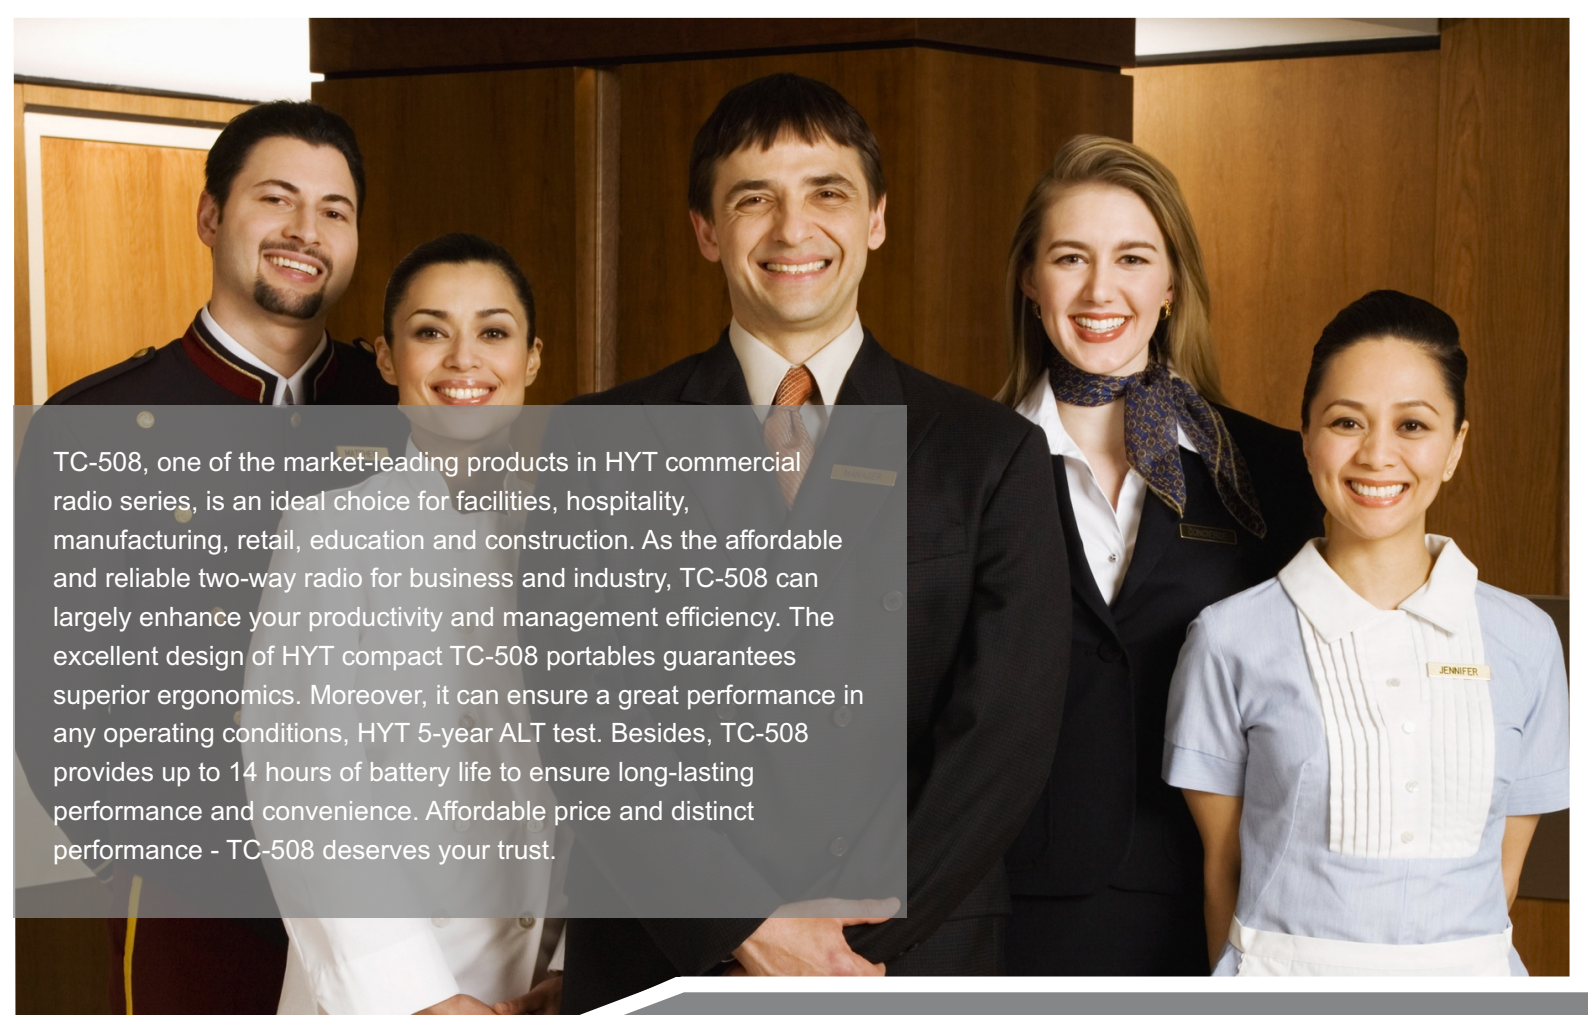

TC-508, one of the market-leading products in HYT commercial radio series, is an ideal choice for facilities, hospitality, manufacturing, retail, education and construction. As the affordable and reliable two-way radio for business and industry, TC-508 can largely enhance your productivity and management efficiency. The excellent design of HYT compact TC-508 portables guarantees superior ergonomics. Moreover, it can ensure a great performance in any operating conditions, HYT 5-year ALT test. Besides, TC-508 provides up to 14 hours of battery life to ensure long-lasting performance and convenience. Affordable price and distinct performance - TC-508 deserves your trust.

TC-508

Professional Two-way Radio

Leading Features

■ Tough & Light-weight

TC-508 has a light-weight but exceptionally strong body, allowing it to be carried about easily and to survive harsh conditions.

■ Robust & Reliable

TC-508 is built to survive the hard knocks, drops and some tough environments of its users. It meets or exceeds the HYT 5-year ALT test.

■ Longer Battery Life

TC-508 is equipped with a 1650mAh battery that enables you to transmit and receive, on a 5-5-90 basis, for up to 14 hours.

■ Enhanced Voice Quality

TC-508 employs advanced voice technologies to better the sound quality during your communication.

Main Functions

High/Low Power Switch

Wide/Narrow Band Switch

Monitor

CTCSS/CDCSS and Squelch Tail Elimination

Channel Scan

Battery Save

Low Battery Alert

Busy Channel Lockout

Time-out Timer (TOT)

PC Programmable

Wired Clone

Squelch Levels Selectable

Recommended Applications

- | | |
|-----------------|----------------|
| ■ Hospitality | ■ Education |
| ■ Manufacturing | ■ Construction |
| ■ Retail | ■ Security |

Accessories

Standard
Accessories

Li-Ion Battery
Belt Clip

Rapid-Rate Charger (for Li-Ion Battery)
Strap

Power Adapter
Antenna

Optional
Accessories



Li-Ion Battery (1300mAh)
BL1301



Vehicle Power Adapter
CHV09



Six-unit Switching Power
PS7002



Nylon Carrying Case
(not swivel)(black)
NCN001



Note: Pictures above are for reference only and may vary from actual product.

General

Frequency Range(MHz)	VHF: 146-174 UHF: 450-470
Channel Capacity	16
Channel Spacing(KHz)	25 /12.5
Operating Voltage(V)	7.4
Battery	1650mAh (Li-Ion Battery)
Battery Life (5-5-90 Duty Cycle)	14 hours
Frequency Stability(ppm)	±2.5
Operating Temperature(°C)	-20~+65
Antenna Impedance(Ω)	50
Dimensions (H×W×D)(with battery, without antenna)(mm)	113×54×35
Weight (with antenna & battery)(g)	280
Dust and Water Ingress	IP54 Standard
Shock and Vibration	Per MIL-STD-810 C/D/E/F/G Standard

Transmitter

Power Output	5W/2W(VHF) 4W/2W(UHF)
Modulation	16K0F3E/11K0F3E
Spurious and Harmonics	≤-26dBm (<1G)
FM Noise	40/35dB
Audio Distortion	≤5 %
Modulation Limiting	≤5KHz (25KHz) ≤2.5KHz (12.5KHz)
Audio Response	≤+1~-3dB (6dB/oct pre-emphasized, 300-3000Hz)

Receiver

Sensitivity	≤0.251uV/0.282uV
Adjacent Channel Selectivity	65dB/55dB
Intermodulation	60dB
Spurious Response Rejection	65dB
S/N	45dB/40dB
Rated Audio Power Output	0.5W (Speaker impedance: 16 Ohm)
Rated Audio Distortion	≤5% (0.5W)
Conducted Spurious Emission	-57dBm < 1GHz -47dBm > 1GHz

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.



Hytera_TC-508_DS-vB

HYT, Hytera are registered trademarks of Hytera Communications Co., Ltd.
© 2021 Hytera Communications Co., Ltd. All Rights Reserved.
Hytera retains right to change the product design and specification.

CAVCOM
CavComInc.com

**Contact Us Online
Or Let's Talk!
866-547-4988**

